

UTILITY
PATENT APPLICATION
TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.

862.C1942

First Named Inventor or Application Identifier

MASAHIKO OKUNUKI

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages **33**
3. ☒ Drawing(s) (35 USC 113) Total Sheets **11**
4. ☒ Oath or Declaration Total Pages **1**
- a. ☒ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	15-20 =	0	X \$ 18.00 =	\$ 0.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	2-3 =	0	X \$ 78.00 =	\$ 0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
	Total of above Calculations =				\$ 690.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 690.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$690.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Steven E. Warner - Reg. No. 33,326
SIGNATURE	
DATE	June 28, 2000

SEW\cmv

TITLE OF THE INVENTION

CHARGED-PARTICLE BEAM DRAWING DATA CREATION METHOD, AND
CHARGED-PARTICLE BEAM DRAWING APPARATUS USING THE SAME

5

FIELD OF THE INVENTION

The present invention relates to a
charged-particle beam drawing method for drawing the
pattern of a semiconductor integrated circuit such as an
LSI on a sample such as a mask or wafer at high speed
10 and high precision and, more particularly, to a data
creation method for realizing high-precision drawing
using drawing pattern data prepared by compressing data,
and a charged-particle beam drawing apparatus using the
same.

15

BACKGROUND OF THE INVENTION

In recent years, LSI patterns continue to shrink
in feature size and increase in integration degree. For
example, the integration degree of DRAMs is increasing
20 from 64 M to 256 M, 1 G, and 4 G. The micropatterning
technique is one of the most important process
techniques.

An electron beam drawing apparatus, which can
perform micropatterning at 0.1 μm or less, is expected
25 as an effective exposure means for forming a highly
integrated LSI pattern. In drawing a desired LSI pattern

using this electron beam drawing apparatus, design pattern data created by a pattern data creation tool such as a CAD used for LSI pattern design cannot be directly supplied as drawing pattern data for the
5 electron beam drawing apparatus. For this reason, design pattern data must be converted into a data system receivable by the electron beam drawing apparatus so as to draw the data at a high speed.

An example of the electron beam drawing apparatus
10 will be described. Fig. 9 shows the data flow (prior art) of a drawing system. In the data conversion step, design pattern data 51 stored in an external storage device such as a magnetic disk is read in the memory of a computer in data read (step 50). In data processing
15 (step 52), a multiple-exposed region is removed, and correction processing such as proximity effect correction is done. Then, basic figure division (step 53) into a rectangle, trapezoid, triangle, and the like is executed for each unit drawing region determined by a
20 beam deflection region. Accordingly, the design pattern data 51 is converted into drawing pattern data 55 receivable by the electron beam drawing apparatus.

In drawing data storage (step 54), the converted drawing pattern data 55 is stored in an external storage
25 device represented by a magnetic disk.

In the data transfer step, the drawing pattern

data 55 converted in the previous step is read in step 56, transferred to a buffer memory in step 57, and registered in step 58. Then, the data transfer step is complete.

5 In the drawing step, JOB data 61 serving as drawing schedule data of the electron beam apparatus is read in drawing condition setting (step 60). In stripe data read (step 62), drawing pattern data of one stripe to be drawn by one stage scanning is read out from the
10 buffer memory in step 58. The drawing pattern data made up of basic figures undergoes bitmapping processing (step 63). The bitmap data is transferred to a pattern memory in step 64, and output to a beam blanker serving as a beam-ON/OFF means in step 65. Then, an electron
15 beam is ON/OFF-controlled to draw a pattern (step 66). After one stripe is drawn, the drawing step restarts from stripe data read (step 62) for drawing the next strip. This is repeated to complete drawing of all chips placed on a wafer.

20 Fig. 10 is a block diagram showing an electron beam drawing apparatus for drawing a pattern in accordance with the data flow (prior art) of the above drawing system. The electron beam drawing apparatus is roughly constituted by an electron beam drawing
25 apparatus main body 280 and a drawing control system 290. The electron beam drawing apparatus main body 280 is

comprised of an electron gun 201, convergent lens 202, reduction lens 203, deflector 204, blanker 205, and stage 207. An electron beam EB emitted by the electron gun 201 is converged into 0.1 μm or less via the

5 convergent lens 202 and reduction lens 203 to irradiate a wafer 208 on the stage. The electron beam EB is adjusted in position by the deflector 204 (made up of two, main deflector 204-1 and sub-deflector 204-2), and ON/OFF-controlled by the blanker 205.

10 In the drawing control system 290, drawing pattern data 224 stored in an external storage device 210 such as a magnetic disk is transferred via a CPU 212 to an internal buffer memory 214 of a drawing data processing unit 219 on the basis of settings from a console 211.

15 The data format of the drawing pattern data 224 is a basic figure such as a rectangle, trapezoid, triangle, or the like, which is obtained by dividing design pattern data into figures. The drawing pattern data 224 is subjected in figure calculation processing 217 to
20 calculation processing of converting data of one stripe to be drawn by one stage scanning into bitmap data. Then, the bitmap data is transferred to a pattern memory 218.

After this bitmap data is transferred to a blanker control unit 220, the electron beam EB is
25 ON/OFF-controlled. In synchronism with this, a deflector control unit 222 settles the beam position, and a stage

control unit 223 controls the stage position. A series of drawing operations are performed.

Figs. 11A to 11C show a drawing method when the deflector 204 shown in Fig. 10 is made up of the two, main deflector 204-1 and sub-deflector 204-2. The stage reciprocally scans in a direction (X) perpendicular to the beam deflection direction (Y) of the electron beam EB by the main deflector 204-1, thereby drawing a pattern on all the regions of chips 251 arrayed on the wafer 208. Within the region of a main field 252 scanned by the main deflector 204-1, the sub-deflector 204-2 deflects the electron beam EB to draw a pattern in the region of a smaller subfield 254. The region where the electron beam EB is deflected in the subfield 254 is defined as a basic drawing region, which is reflected on data of basic figure division in creating drawing pattern data from design pattern data in the data conversion step.

As described above, in the conventional electron beam drawing apparatus, design pattern data is defined by a figure system comprised of receivable basic figures (rectangle, trapezoid, triangle, and the like). Further, the design pattern data is defined by a data system obtained by region division for each unit drawing region which depends on the drawing method of the electron beam drawing apparatus. In this manner, drawing pattern data

is created to draw a pattern.

However, this method suffers the following problem.

More specifically, when sorting processing (data rearrangement processing in the drawing order) is
5 executed in units of basic drawing regions while design pattern data created by the CAD is converted into drawing pattern data, the repetitive periodic structure of the pattern of the design pattern data becomes different in size from the unit drawing region of the
10 electron beam drawing apparatus, and becomes different in size from the main field. If the design pattern data is simply divided in units of unit drawing regions/main field regions, the repetitive periodic structure is inhibited. The data must be mapped into many independent
15 divided patterns, which makes it difficult to compress drawing pattern data. For this reason, the pattern regularity defined by the design pattern data is destroyed to increase the data amount and prolong the data conversion time.

20 Also in the data transfer step before the start of drawing, a time required to transfer drawing pattern data obtained by data conversion from an external storage device represented by a magnetic disk to a buffer memory unit is prolonged. In the drawing step, a
25 long time is spent on bitmapping drawing pattern data made up of basic figures.

From this, the time required for a series of data processes decreases the throughput of the electron beam drawing apparatus.

Recently, there is proposed a method of drawing a
5 pattern by ON/OFF-controlling a plurality of electron
beams in parallel with each other using multi-beams. A
plurality of electron beams are arranged in m rows x n
column (m and n are integers of 1 or more), and each
electron beam draws a pattern in a basic drawing region,
10 thereby drawing a two-dimensional pattern. This
high-speed drawing method also suffers the same problem
because the periodicity of design pattern data does not
coincide with that of basic drawing regions arranged in
m rows x n columns. This inhibits increasing the speed
15 of the electron beam drawing apparatus.

In this situation, compression of drawing pattern
data is limited in the current data conversion step.
Moreover, the speeds of the data conversion and drawing
steps cannot be increased. The above-mentioned problem
20 decreases the availability of the electron beam drawing
apparatus, and decreases the productivity of LSIs. This
may pose a serious problem on increasing the reliability
of an LSI pattern drawn by the electron beam drawing
apparatus and the availability of the apparatus along
25 with shrinkage in LSI feature size and increase in
integration degree.

SUMMARY OF THE INVENTION

The present invention has been proposed to solve the conventional problems, and has as its object to
5 provide a drawing pattern data creation method capable of increasing the compression efficiency of drawing pattern data, increasing the speed of the drawing step, and thus increasing the throughput even when the periodicity of design pattern data is different from the
10 arrangement periodicity of basic drawing regions defined by the drawing method of an electron beam drawing apparatus, and an electron beam drawing apparatus using the same.

To achieve the above object, a data creation
15 method and a charged-particle beam drawing apparatus using the same according to the present invention comprise the following steps and arrangement.

That is, a charged-particle beam drawing data creation method of supplying bit information created
20 from design pattern data in a scanning direction of a charged-particle beam, ON/OFF-controlling the charged-particle beam to irradiate a sample surface, and exposing a two-dimensional pattern by scanning the charged-particle beam comprises the steps of
25 extracting a cell pattern as one unit of a periodic structure from design pattern data having a

periodic structure, and registering the cell pattern,
creating arrangement data to be rearranged in a
basic drawing region defined by a charged-particle beam
exposure apparatus using the cell pattern, and

5 registering the arrangement data, and

cutting out data from the cell pattern in
accordance with information of the arrangement data, and
creating data of the basic drawing region.

According to one preferable aspect of the present
10 invention, in the charged-particle beam drawing data
creation method, the basic drawing region includes all
or some of regions of a plurality of cell patterns.

According to another preferable aspect of the
present invention, in the charged-particle beam drawing
15 data creation method, the cell pattern is not smaller in
size than the basic drawing region.

According to still another preferable aspect of
the present invention, in the charged-particle beam
drawing data creation method, the cell pattern is
20 smaller in size than the basic drawing region.

According to still another preferable aspect of
the present invention, in the charged-particle beam
drawing data creation method, the basic drawing region
includes at least some of cell patterns not smaller in
25 size than the basic drawing region and some of cell
patterns smaller in size than the basic drawing region.

According to still another preferable aspect of the present invention, in the charged-particle beam drawing data creation method, the cell pattern is not less than twice in size the basic drawing region.

5 According to still another preferable aspect of the present invention, in the charged-particle beam drawing data creation method, the cell pattern is formed from bitmap data.

10 A charged-particle beam exposure apparatus for supplying bit information created from design pattern data in a scanning direction of a charged-particle beam, ON/OFF-controlling the charged-particle beam to irradiate a sample surface, and exposing a two-dimensional pattern by scanning the charged-particle
15 beam comprises

means for extracting a cell pattern as one unit of a periodic structure from design pattern data having a periodic structure, and registering the cell pattern,

20 means for creating arrangement data to be rearranged in a basic drawing region defined by the charged-particle beam exposure apparatus using the cell pattern, and registering the arrangement data, and

25 means for cutting out data from the cell pattern in accordance with information of the arrangement data, and creating data of the basic drawing region.

According to one preferable aspect of the present

invention, in the charged-particle beam drawing apparatus, the basic drawing region includes all or some of regions of a plurality of cell patterns.

According to another preferable aspect of the present invention, in the charged-particle beam drawing apparatus, the cell pattern is not smaller in size than the basic drawing region.

According to still another preferable aspect of the present invention, in the charged-particle beam drawing apparatus, the cell pattern is smaller in size than the basic drawing region.

According to still another preferable aspect of the present invention, in the charged-particle beam drawing apparatus, the basic drawing region includes at least some of cell patterns not smaller in size than the basic drawing region and some of cell patterns smaller in size than the basic drawing region.

According to still another preferable aspect of the present invention, in the charged-particle beam drawing apparatus, the cell pattern is not less than twice in size the basic drawing region.

According to still another preferable aspect of the present invention, in the charged-particle beam drawing apparatus, the cell pattern is formed from bitmap data.

According to still another preferable aspect of

the present invention, the charged-particle beam drawing apparatus further comprises a plurality of charged-particle beams and a plurality of beam-ON/OFF means arranged in m rows x n columns,

5 wherein in a drawing method of drawing patterns in parallel with each other in respective basic drawing regions by the charged-particle beams,

bitmap drawing data are supplied in parallel with each other to the respective beam-ON/OFF means in the scanning direction of the charged-particle beam, and

10 the plurality of charged-particle beams are controlled to irradiate a sample surface, thereby drawing a two-dimensional pattern.

The above steps and arrangement can increase the compression efficiency of drawing pattern data, can increase the speed of the drawing step, and thus can increase the throughput even when the periodicity of design pattern data is different from the arrangement periodicity of basic drawing regions defined by the drawing method of the electron beam drawing apparatus.

20 Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a view showing design pattern data divided into cell patterns and basic drawing regions;

Figs. 2A to 2E are views showing formation of the basic drawing region by rearrangement of the cell pattern, in which Fig. 2A is a view showing region division of design pattern data,

Figs. 2B to 2D are views showing formation of the basic drawing region by rearrangement of a cell pattern MC, in which Fig. 2B is a view showing MF1,1, Fig. 2C is a view showing MF2,1, and Fig. 2D is a view showing MF2,2, and

Fig. 2E is a view showing formation of the basic drawing region by rearrangement of a cell pattern SC;

Figs. 3A and 3B are views showing an arrangement data format, in which Fig. 3A is a view showing the arrangement data format, and Fig. 3B is a view showing an arrangement data model;

Fig. 4 is a flow chart showing a drawing data flow using rearrangement of the cell pattern;

Figs. 5A to 5D are views showing a drawing method

for an electron beam drawing apparatus using multi-beams,
in which Fig. 5A is a view showing wafer drawing,
Fig. 5B is a view showing a main field, Fig. 5C is a
view showing a subfield, and Fig. 5D is a view showing a
5 basic drawing region;

Fig. 6 is a block diagram showing the electron
beam drawing apparatus using multi-beams;

Fig. 7 is a view for explaining a BAA;

Fig. 8 is a view showing design pattern data
10 divided into cell patterns and basic drawing regions for
multi-beam drawing using a one-dimensional arrangement;

Fig. 9 is a flow chart showing the data flow
(prior art) of a drawing system;

Fig. 10 is a block diagram showing an electron
15 beam drawing apparatus; and

Figs. 11A to 11C are views showing a drawing
method for two deflectors, in which Fig. 11A is a view
showing wafer drawing, Fig. 11B is a view showing a main
field, and Fig. 11C is a view showing a subfield.

20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention
will now be described in detail in accordance with the
accompanying drawings.

25 A conversion method utilizing the repetitive
periodic structure of design pattern data in converting

the design pattern data into drawing pattern data, and a drawing method using the drawing pattern data will be explained below.

Fig. 1 is a view best showing the present invention. In Fig. 1, design pattern data is divided into cell patterns each serving as one unit of a repetitive periodic structure, and basic drawing regions defined by the deflection method of an electron beam drawing apparatus.

Design pattern data 1 is a wiring pattern 4 for a typical DRAM or the like, and has a repetitive periodic structure. Each cell pattern 2 (solid-line region of the design pattern data 1) is set to maintain the periodicity of the wiring pattern 4. Each basic drawing region 3 (dotted-line region of the design pattern data 1) is determined by the deflection method of the electron beam drawing apparatus, and has a size different from the periodicity of the drawing pattern. The cell pattern 2 is divided as a cell pattern MC larger in size than the basic drawing region 3 (cell pattern $MC \geq$ basic drawing region).

In this embodiment, the cell pattern 2 and the basic drawing region 3 are different in size. If the design pattern data 1 is simply divided into the basic drawing regions 3 at the size of the cell pattern 2, the division number increases to decrease the compression

efficiency of drawing pattern data. In terms of data compression, the cell pattern and the basic drawing region must be defined by independent sizes in dividing design pattern data.

- 5 Figs. 2A to 2E are views showing formation of the basic drawing region by rearrangement of the cell pattern. Fig. 2A is a view showing region division of design pattern data based on the cell pattern and basic drawing region to which reference symbols are affixed.
- 10 In Fig. 2A, cell patterns are represented as different patterns MC1, MC2, and MC3. The basic drawing regions are symbolized from the left to the right and from the top to the bottom as MF1,1, MF2,1,...., MF1,2, MF2,2,...., MF1,3, MF2,3,....
- 15 Figs. 2B and 2C are views showing formation of the basic drawing region by rearrangement of the cell pattern MC. Fig. 2B shows the basic drawing region MF1,1. A pattern corresponding to MF1,1 can be cut out by designating the region of the cell pattern MC1. Fig. 2C
- 20 shows MF2,1, and Fig. 2D shows MF2,2. Each basic drawing region is located across cell patterns. Thus, in forming the pattern of this basic drawing region, data of the basic drawing region can be formed by designating a cutout region for each of the cell patterns.
- 25 When a basic drawing region exists within a single cell pattern, like MF1,2 in Fig. 2A, the size of the

cell pattern is set twice or more the size of the basic drawing region. This allows cutting out data of the basic drawing region from the cell pattern by one region designation regardless of the cutout position of the
5 cell pattern.

Fig. 2E is a view showing formation of the basic drawing region by rearrangement of a cell pattern SC (basic drawing region) smaller than the basic drawing region. In this case, data of the basic drawing region
10 can be formed by designating an arrangement location within the basic drawing region for a cell pattern SC1, and designating the cutout region of the cell pattern SC for SC2, similar to the cell pattern MC.

For the cell pattern MC, data of the basic drawing
15 region can be formed by designating a region and cutting out a pattern. For the cell pattern SC, data of the basic drawing region can be formed by designating an arrangement location or designating the cutout region of a pattern. From this, drawing data in units of basic
20 drawing regions can be created using, for each basic drawing region, the cell patterns MC and SC, and arrangement data for selecting and arranging the cell patterns MC and SC as drawing pattern data.

The arrangement data format using the cell
25 patterns MC and SC will be explained.

Figs. 3A and 3B are views showing the arrangement

data format in forming data of the basic drawing region.
Fig. 3A is a view showing the generalized definition of
the arrangement data format. One basic drawing region is
made up of one or a plurality of cell patterns MC or SC.

- 5 This embodiment will exemplify two steps, i.e., the
arrangement designation step for the cell pattern MC and
that for the cell pattern SC.

In Fig. 3A, mMC and nSC are set as the numbers of
cell patterns MC and SC for forming basic drawing
10 regions in step A1. The type of cell pattern MC is
designated in step A2, and the coordinates of a paste
position to a basic drawing region are designated in
step A3. A cutout start position in cutting out the cell
pattern MC is designated in step A4, and a cutout size
15 (dx,dy) from the cell pattern MC is designated in step
A5. In steps A6 to A9, cutout designation for another
cell pattern MC is done. This processing is repeated by
the number mMC of cell patterns MC designated in step A1.

Step A12 and subsequent steps concern data
20 formation of the cell pattern SC smaller in size than
the basic drawing region. The type of cell pattern SC is
designated in step A12, and the coordinates of a paste
position to a basic drawing region are designated in
step A13. Steps A14 to A17 are repeated by the number
25 nSC of cell patterns SC designated in step A1. In this
case, the cell pattern SC is located across basic

drawing regions, and thus expressed by the same format as that of the cell pattern MC.

Using the above arrangement data format, data of the basic drawing region can be formed from a prepared
5 cell pattern. Since a pattern smaller than the basic drawing region can also be rearranged, the present invention can also be applied to a device structure such as an ASIC having a low pattern periodicity.

Fig. 3B is a view showing an arrangement data
10 model in Figs. 2B and 2C. In steps B1 to B5, pattern arrangement for MF1,1 is executed. One cell pattern MC is designated in step B1. The type of cell pattern MC is designated to MC1 in step B2, and the coordinates (0,0) of a paste position to the basic drawing region MF1,1
15 are designated in step B3. In step B4, the cutout start position (0,0) of bitmap data of the cell pattern MC1 is designated (in this case, the size of each of the basic drawing region and cell pattern in the X and Y directions is defined as one unit). In step B5, a cutout
20 size (dx,dy) from the bitmap data of the cell pattern MC1 is designated. In this case, a cutout size (1,1) is designated.

In steps B8 to B16, data arrangement in MF2,1 is performed. In step B8, two cell patterns MC are
25 designated. Similar to MF1,1, the type of cell pattern MC is designated to MC1 in step B9. The coordinates

(0,0) of a paste position to a basic drawing region are designated in step B10, and a cutout start position (0.8,0) from the cell pattern MC1 is designated in step B11. In step B12, a cutout size (0.3,1) is designated.

- 5 In steps B13 to B16, the cutout step from the cell pattern MC2 is repeated for two cell patterns MC designated in step B8.

Fig. 4 is a flow chart showing drawing data processing by rearrangement of the cell pattern using a data compression method and a data mapping method in the present invention.

In the data conversion step, design pattern data 21 stored in an external storage device such as a magnetic disk is read in the memory of a computer in data read (step 20). In data processing (step 22), a multiple-exposed region is removed, and correction processing such as proximity effect correction is done.

Then, the periodicity of the design pattern data is determined, and the flow shifts to the step of converting the design pattern data into drawing pattern data. Data processing (step 23) for repetitive cells from the design pattern data is executed, and the size of a cell pattern CP is compared with that of a basic drawing region MF. In step 24, cell patterns CP larger than the basic drawing region MF are determined, and registered as cell patterns MC 25.

In step 26, cell patterns CP smaller than the basic drawing region MF are determined, and registered as cell patterns SC 27. In step 28, arrangement data for rearranging data in units of basic drawing regions is
5 created using the cell patterns MC 25 and SC 27 divided/classified from the design pattern data. The obtained data is registered as arrangement data 29. The cell pattern adopts a bitmap data format, but may use the above-described basic figures. In this case, data
10 made up of the cell patterns MC 25 and SC 27 and the arrangement data 29 are defined as drawing pattern data 30.

In the data transfer step, the cell patterns MC 25 and SC 27 registered as the drawing pattern data 30 are
15 read out from the external storage device in step 31. In step 32, bitmap data of the cell patterns are transferred to a buffer memory 40 of a drawing control system. In step 33, the arrangement data 29 is read out from the external storage device, and transferred to the
20 buffer memory 40, completing the data transfer step.

For the DRAM, patterns can be drawn in almost all the regions by division of the cell pattern by preparing almost 100 types of cell patterns. Thus, division of the cell pattern can be effectively utilized.

25 When the size of the cell pattern is 8 μm , and the interval of one bit is 0.025 μm , the data amount of

bitmap data of all cell patterns is 10 x 106 bits. This data amount is much smaller than a data amount of 640 x 109 bits obtained when pattern data of a 20 mm x 20 mm-size chip is directly used as bitmap data. Cell patterns can, therefore, be stored in the buffer memory.

In the drawing step, JOB data 42 is read in drawing condition setting (step 41), and arrangement data of one stripe to be drawn by one stage scanning is read in step 43. In step 44, this arrangement data is mapped into bitmap drawing data for drawing a pattern. The bitmap drawing data is transferred to a pattern memory in step 45.

The bitmap data is output to the beam-ON/OFF means of a blanker control unit or BAA (Blanking Aperture Array) control unit in step 46, and a pattern is drawn in step 47.

Drawing is done by reciprocally scanning the stage. During stripe drawing, arrangement data of the next stripe region is read out from the buffer memory. Bitmap drawing data is formed and transferred to another pattern memory to prepare for drawing the next stripe region.

The drawing data flow shown in Fig. 4 can be applied not only to the electron beam drawing apparatus using a single beam shown in Fig. 10, but also to the following electron beam drawing apparatus using

multi-beams.

Figs. 5A and 5B are views showing a drawing method for the electron-beam drawing apparatus using multi-beams. As shown in Fig. 5A, a stripe 153 on a chip 151 is drawn on a wafer 108 placed on the stage during scanning in the X direction. As shown in Fig. 5B, a main field 152 is formed by scanning in the stripe direction and vertical direction by a main deflector. As shown in Fig. 5C, a subfield 154 is formed by a plurality of beams arranged in m rows x n columns (m and n are integers of 1 or more) in units of basic drawing regions 155. A pattern is drawn in this subfield by simultaneously deflecting m x n beams by a sub-deflector. Fig. 5D shows a state in which a beam spot 160 scans the basic drawing region 155 to draw a pattern.

High-speed drawing is realized by a drawing method of parallel-arranging basic drawing regions defined by the deflection method of the electron beam drawing apparatus using multi-beams. However, this method poses problems in data conversion and data transfer, similar to the prior art, when the size of the basic drawing region does not coincide with the periodicity of design pattern data. To the contrary, a method of registering periodic patterns larger and smaller in size than the basic drawing region as cell patterns MC and SC, cutting out cell patterns in drawing, and forming basic drawing

regions, as shown in Figs. 1 to 3, is a drawing pattern data compression method effectively utilizing the periodicity of design pattern data. This method can greatly shorten the transfer time of drawing pattern data.

Fig. 6 is a block diagram showing an electron beam drawing apparatus using multi-beams. Compared to the electron beam drawing apparatus in Fig. 10, the drawing speed is increased using a plurality of electron beams. Fig. 6 shows the drawing step in Fig. 4. The electron beam drawing apparatus in Fig. 6 is different from that in Fig. 10 in that a BAA unit 105 capable of ON/OFF-controlling a plurality of electron beams EB is disposed instead of the blanker.

Compared to Fig. 10, a drawing control system 190 is characterized by a BAA control unit 121, and a buffer memory 114, arrangement calculation processing 117, and pattern memory 118 for parallel-controlling a plurality of blankers arranged in m rows x n columns, which are incorporated in a drawing data processing unit 119.

The BAA unit 105 will be described with reference to Fig. 7. Fig. 7 is a plan view showing the BAA unit when viewed from the top. Basic units each made up of an aperture 132 for transmitting the electron beam EB and surrounding small-size blankers 131 are arranged in an m x n matrix. The arrangement period of the blankers

correspond to the period of basic drawing regions.

The drawing step in Fig. 4 will be explained with reference to Fig. 6. An external storage device 110 in the drawing control system 190 stores drawing pattern data made up of cell patterns MC and SC and arrangement pattern data. Before drawing starts, this drawing pattern data is transferred to the areas of cell pattern data 115 and arrangement data 116 in the buffer memory 114 via a CPU 112. After drawing starts, the arrangement data 116 is read in the arrangement calculation processing 117, and bitmap drawing data mapping processing is done in units of basic drawing regions using the cell patterns MC and SC of the buffer memory 114 based on the arrangement data 116. After that, the processed data is transferred to the pattern memory 118.

In this case, bitmap data of strips which can be drawn by one stage scanning is transferred to a pattern memory (A) 118-1. This bitmap data is parallel-transferred to the BAA control unit 121 as signals for ON/OFF-controlling the beam. A pattern is drawn in synchronism with a deflector control unit 122 and a stage control unit 123. While stripe data (A) 118-1 (pattern memory) is drawn, bitmap data of stripe data (B) 118-2 for the next drawing is prepared. Thus, drawing of the stripe data (B) 118-2 can start immediately after the stripe data (A) 118-1 is drawn.

The two pattern memories A and B are adopted in Fig. 6, but three or more parallel pattern memories may be used to shorten the drawing time.

In arrangement calculation processing, the region of cell pattern data made from bitmap data is designated, and pattern data is cut out to form data of a basic drawing region. As this method, a graphic RAM capable of extracting an arbitrary memory area can be used to increase the speed.

This embodiment has exemplified multi-beams arranged two-dimensionally. However, the present invention can also be applied when the array of electron beams arranged not two-dimensionally but one-dimensionally is deflected, or a two-dimensional pattern is drawn by stage scanning.

Fig. 8 shows a case in which a two-dimensional pattern region is drawn by electron beam scanning or stage scanning in a direction perpendicular to a one-dimensional electron beam array direction. In Fig. 10, similar to Fig. 1, design pattern data 5 is divided into cell patterns 6 (solid-line regions of the design pattern data 5) and basic drawing regions 7 (dotted-line regions of the design pattern data 5). In this case, each basic drawing region 7 has an elongated stripe shape. Similarly, each cell pattern 6 has a stripe shape conforming to the repetitive periodic

structure of the design pattern data 5. Each basic drawing region 7 can use arrangement data to form drawing data.

As described above, drawing pattern data
5 containing cell patterns and arrangement data is formed utilizing the periodicity of design pattern data. The data is transferred and stored in the buffer memory. Based on the arrangement data, cell pattern data is rearranged to create bitmap drawing data. Hence, the
10 drawing pattern data creation method and the electron beam drawing apparatus using the same according to the present invention are effective not only for an electron beam drawing apparatus using a single electron beam, but also for a multi-beam drawing system using a BAA unit
15 and a multi-beam drawing system using one- or two-dimensionally arranged solid-state electron sources formed by micropatterning.

The present invention can also be applied not only to a drawing apparatus using an electron beam, but also
20 to a drawing apparatus using an ion beam.

The present invention can compress data more effectively than the prior art because pattern data is registered as a cell pattern without destroying the periodicity. The time required for data transfer from a
25 magnetic disk to a buffer memory can be shortened, and the capacity of the buffer memory can be reduced. This

greatly contributes to increasing the reliability and the availability of the apparatus without decreasing the drawing throughput of the electron beam drawing apparatus along with shrinkage in feature size and

5 increase in integration degree.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific
10 embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A charged-particle beam drawing data creation method of supplying bit information created from design pattern data in a scanning direction of a charged-particle beam, ON/OFF-controlling the charged-particle beam to irradiate a sample surface, and exposing a two-dimensional pattern by scanning the charged-particle beam, comprising the steps of:
 - extracting a cell pattern as one unit of a periodic structure from design pattern data having a periodic structure, and registering the cell pattern;
 - creating arrangement data to be rearranged in a basic drawing region defined by a charged-particle beam exposure apparatus using the cell pattern, and registering the arrangement data; and
 - cutting out data from the cell pattern in accordance with information of the arrangement data, and creating data of the basic drawing region.
2. The method according to claim 1, wherein the basic drawing region includes all or some of regions of a plurality of cell patterns.
3. The method according to claim 1, wherein the cell pattern is not smaller in size than the basic drawing region.
4. The method according to claim 1, wherein the cell pattern is smaller in size than the basic drawing region.

5. The method according to claim 1, wherein the basic drawing region includes at least some of cell patterns not smaller in size than the basic drawing region and some of cell patterns smaller in size than the basic drawing region.

6. The method according to claim 1, wherein the cell pattern is not less than twice in size the basic drawing region.

7. The method according to claim 1, wherein the cell pattern is formed from bitmap data.

8. A charged-particle beam exposure apparatus for supplying bit information created from design pattern data in a scanning direction of a charged-particle beam, ON/OFF-controlling the charged-particle beam to irradiate a sample surface, and exposing a two-dimensional pattern by scanning the charged-particle beam, comprising:

means for extracting a cell pattern as one unit of a periodic structure from design pattern data having a periodic structure, and registering the cell pattern;

means for creating arrangement data to be rearranged in a basic drawing region defined by the charged-particle beam exposure apparatus using the cell pattern, and registering the arrangement data; and

means for cutting out data from the cell pattern in accordance with information of the arrangement data,

and creating data of the basic drawing region.

9. The apparatus according to claim 8, wherein the basic drawing region includes all or some of regions of a plurality of cell patterns.

5 10. The apparatus according to claim 8, wherein the cell pattern is not smaller in size than the basic drawing region.

10 11. The apparatus according to claim 8, wherein the cell pattern is smaller in size than the basic drawing region.

12. The apparatus according to claim 8, wherein the basic drawing region includes at least some of cell patterns not smaller in size than the basic drawing region and some of cell patterns smaller in size than
15 the basic drawing region.

13. The apparatus according to claim 8, wherein the cell pattern is not less than twice in size the basic drawing region.

14. The apparatus according to claim 8, wherein the
20 cell pattern is formed from bitmap data.

15. The apparatus according to claim 8, further comprising:

a plurality of charged-particle beams and a plurality of beam-ON/OFF means arranged in m rows x n
25 columns,

wherein in a drawing method of drawing patterns in

parallel with each other in respective basic drawing regions by the charged-particle beams,

bitmap drawing data are supplied in parallel with each other to said respective beam-ON/OFF means in the
5 scanning direction of the charged-particle beam, and

the plurality of charged-particle beams are controlled to irradiate a sample surface, thereby drawing a two-dimensional pattern.

ABSTRACT OF THE DISCLOSURE

A charged-particle beam drawing data creation method of supplying bit information created from design pattern data in the scanning direction of a
5 charged-particle beam, ON/OFF-controlling the charged-particle beam to irradiate a sample surface, and exposing a two-dimensional pattern by scanning the charged-particle beam includes the step of extracting a cell pattern as one unit of a periodic structure from
10 design pattern data having a periodic structure, and registering the cell pattern, the step of creating arrangement data to be rearranged in a basic drawing region defined by a charged-particle beam exposure apparatus using the cell pattern, and registering the
15 arrangement data, and the step of cutting out data from the cell pattern in accordance with information of the arrangement data, and creating data of the basic drawing region.

FIG. 1

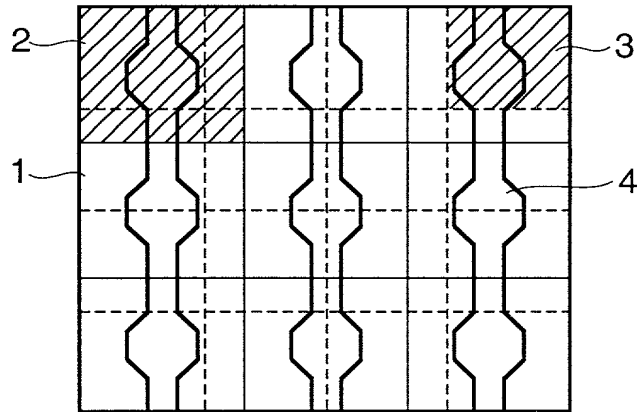


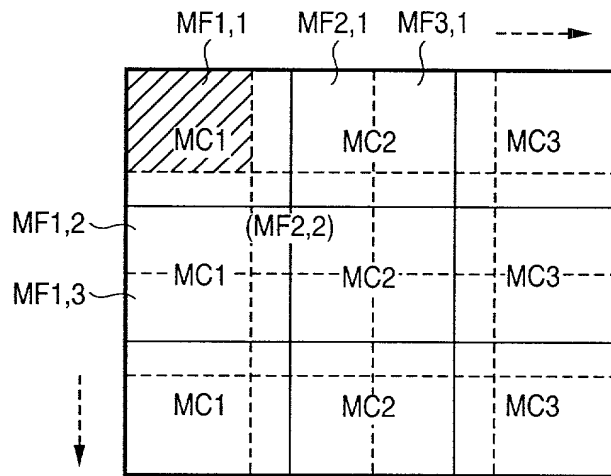

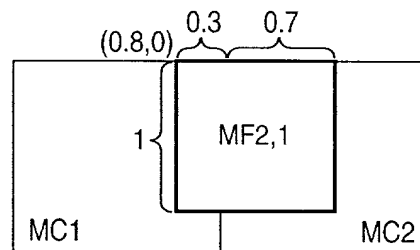
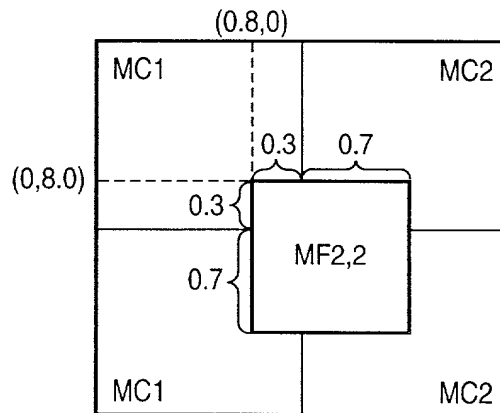

FIG. 2A**FIG. 2B****FIG. 2C****FIG. 2D****FIG. 2E**

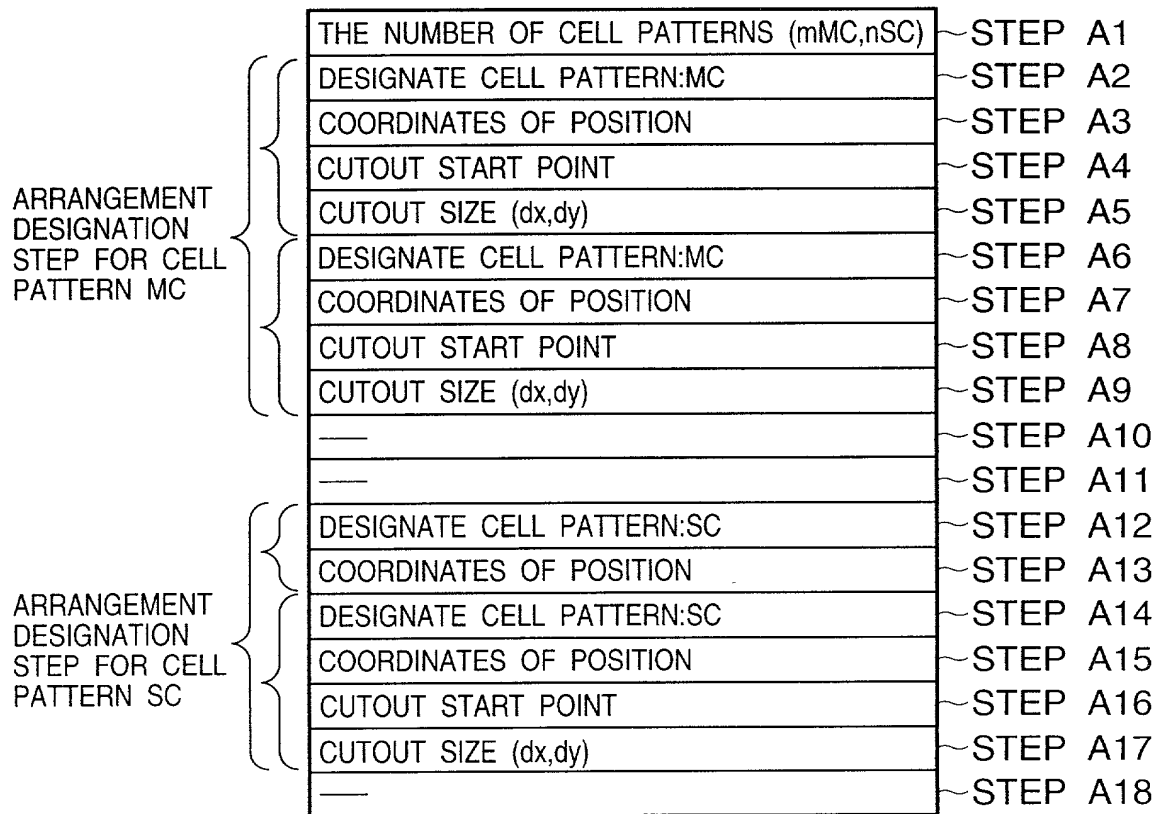
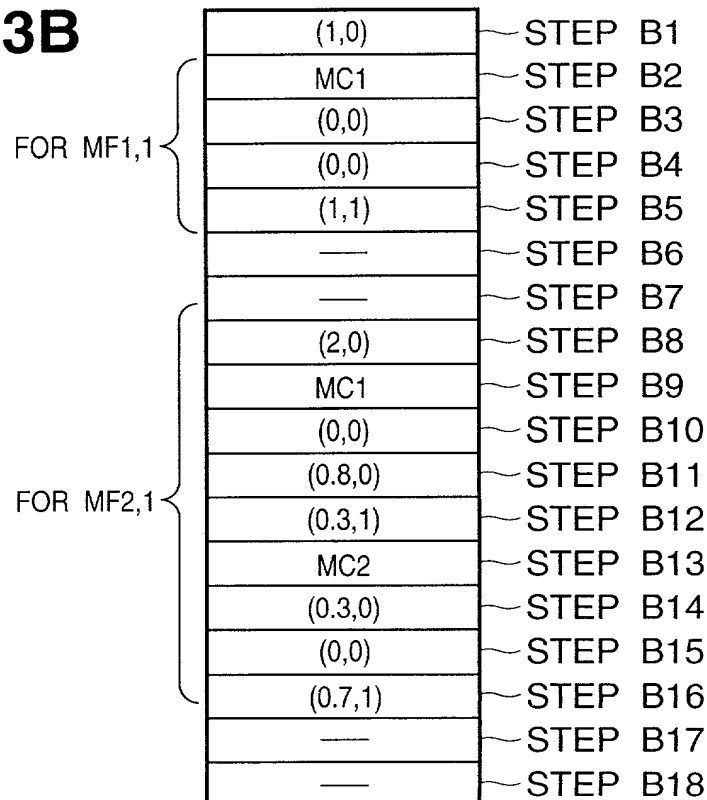
FIG. 3A**FIG. 3B**

FIG. 4

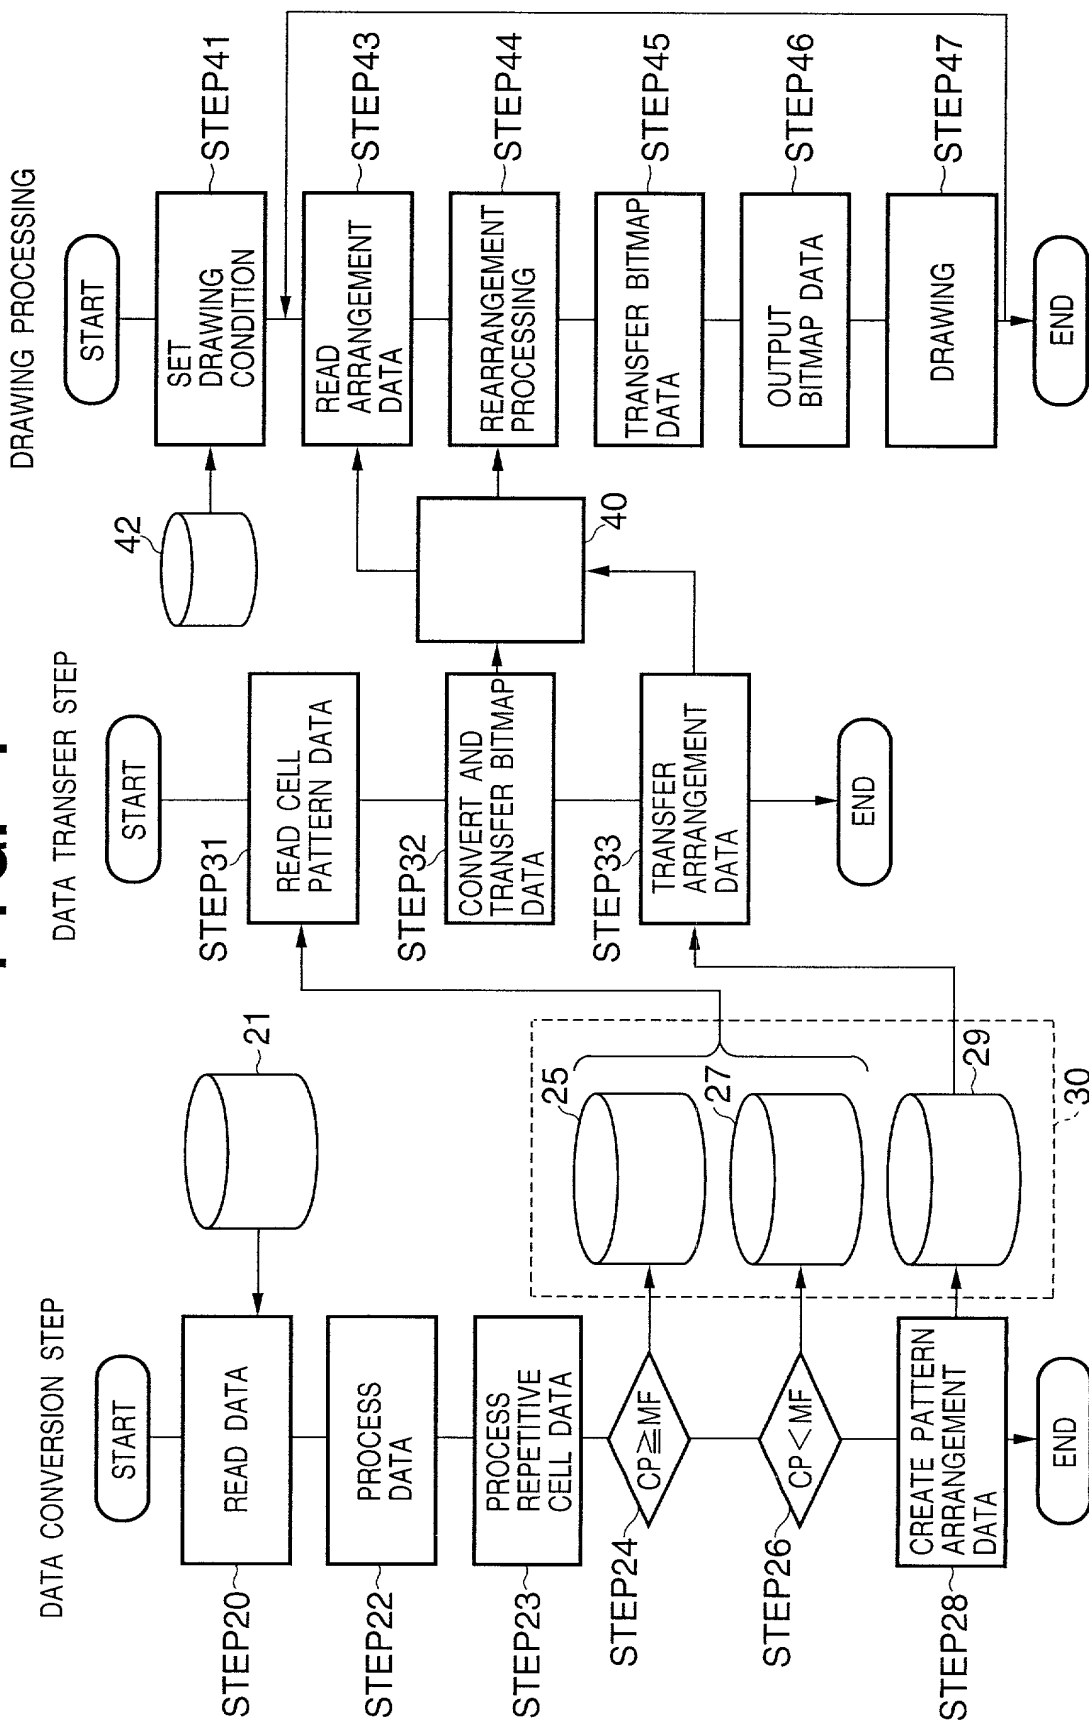


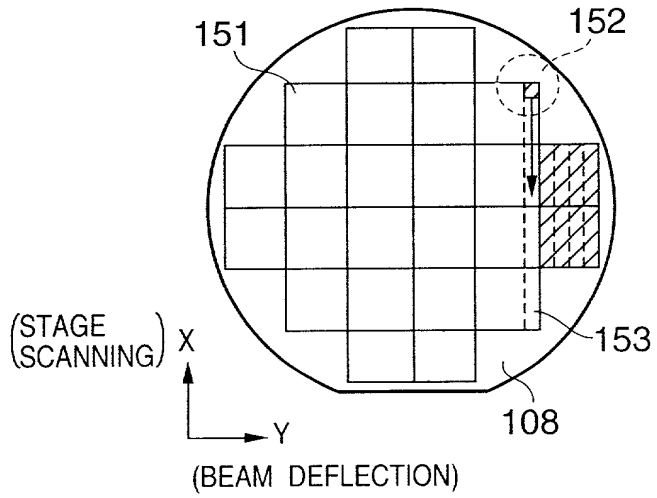

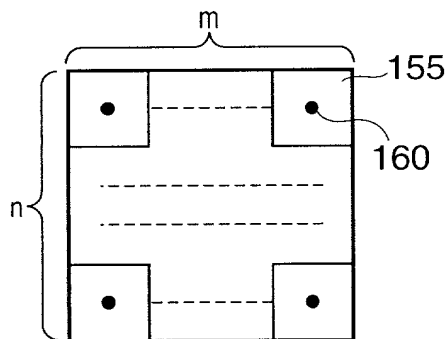
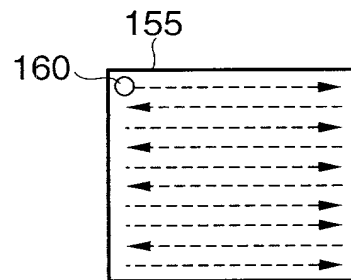
FIG. 5A**FIG. 5B****FIG. 5C****FIG. 5D**

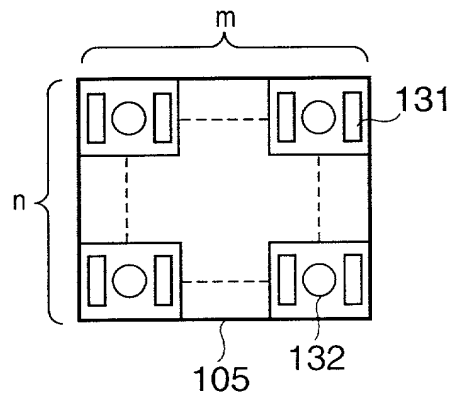
FIG. 7

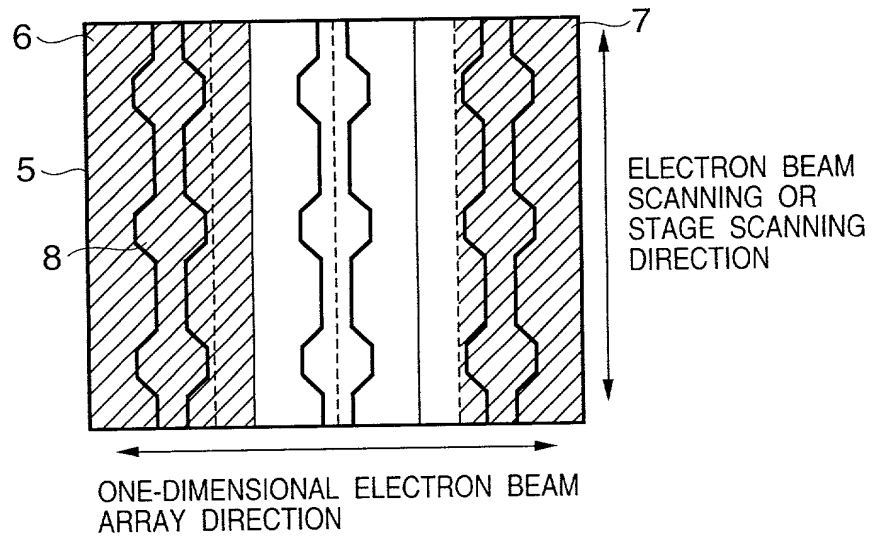
FIG. 8

FIG. 9

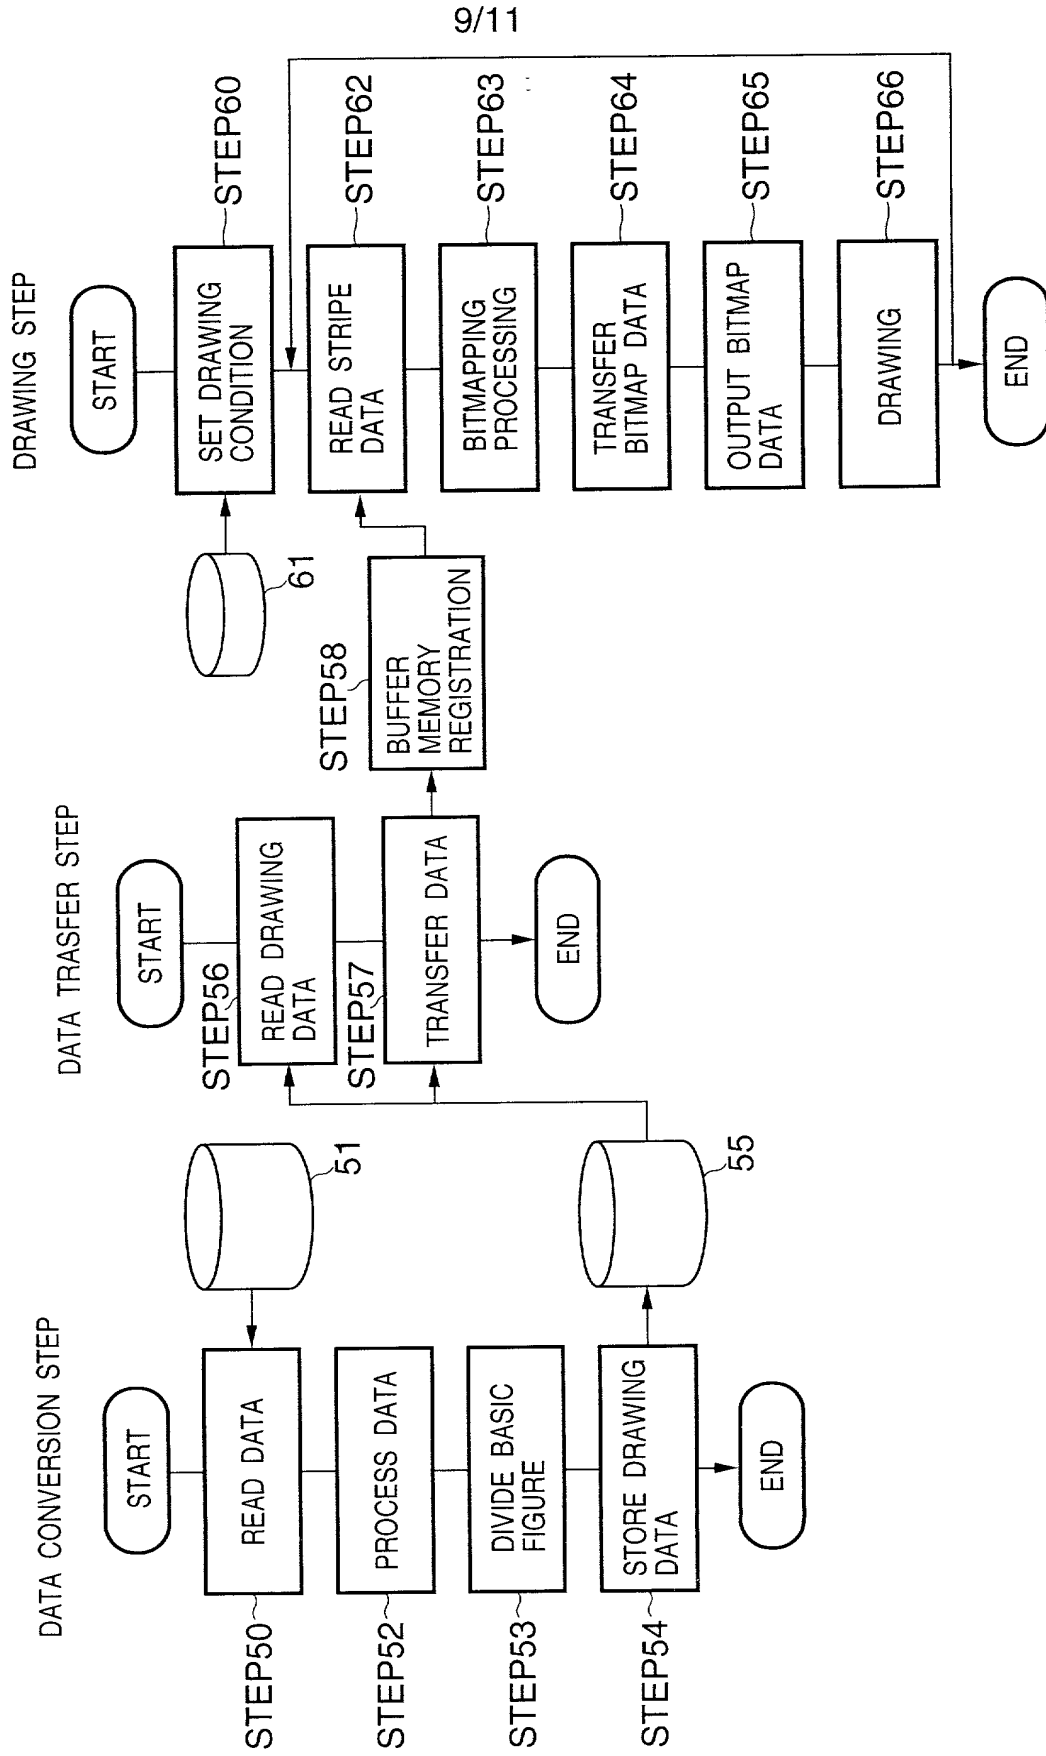


FIG. 10

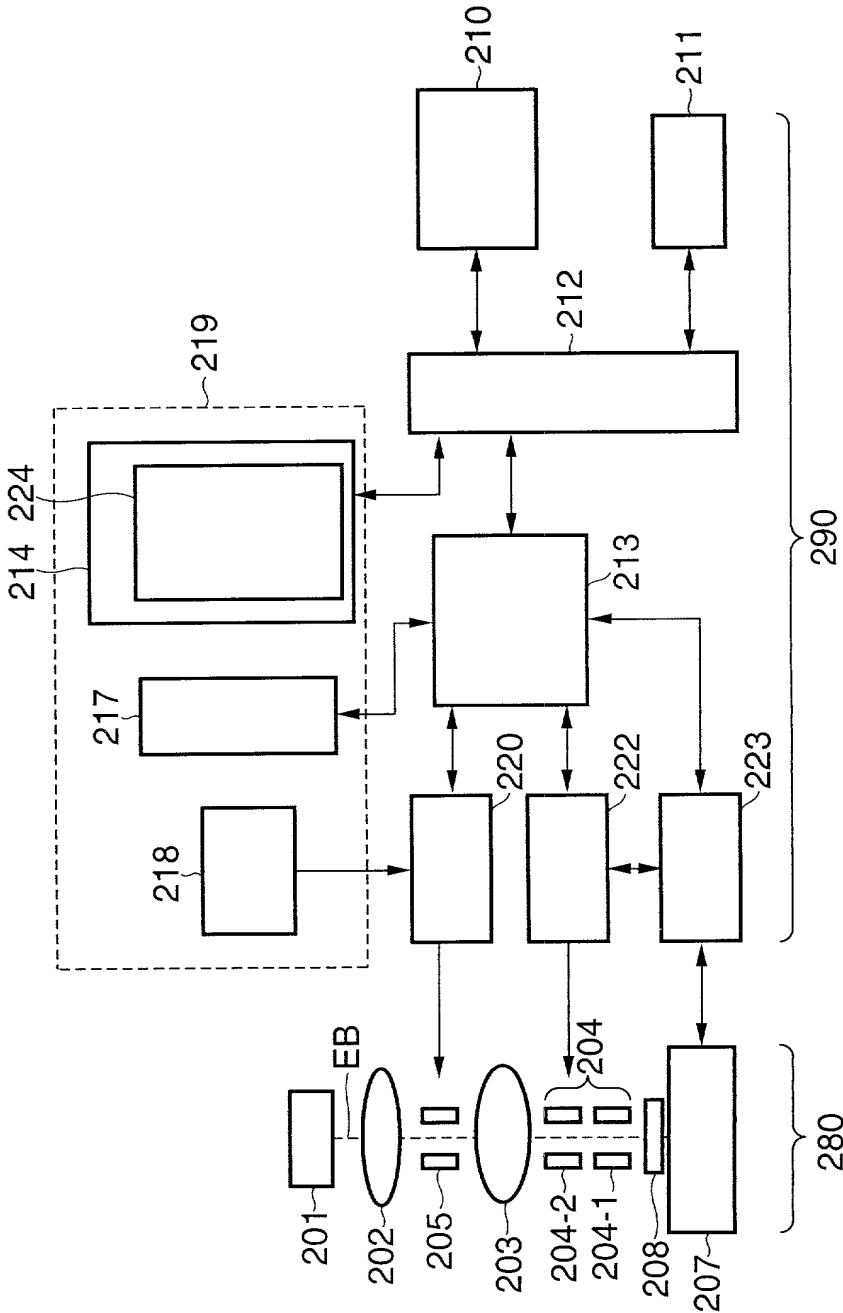


FIG. 11A

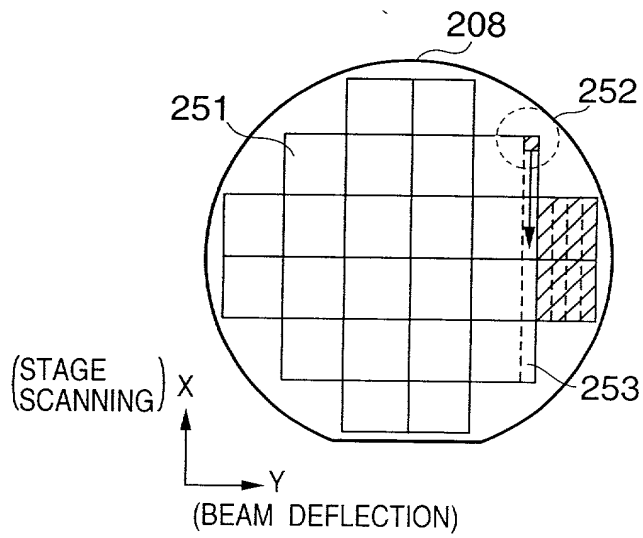


FIG. 11B


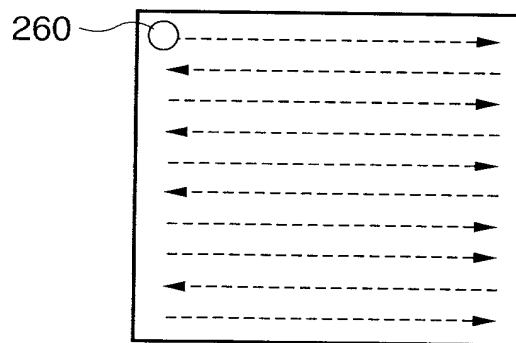


FIG. 11C



COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CHARGED-PARTICLE BEAM DRAWING DATA CREATION METHOD, AND

CHARGED-PARTICLE BEAM DRAWING APPARATUS USING THE SAME,

the specification of which [x] is attached hereto. [] was filed on _____

as United States Application No. or PCT International Application No. _____

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No) Priority Claimed</u>
JAPAN	11-187692	01/07/1999	Yes

I hereby appoint the practitioners associated with the firm and customer number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Masahiko OKUNUKI

Inventor's signature *Masahiko Okunuki*

Date June 21, 2000 Citizen/Subject of Japan

Residence 1252-6, Ina, Akiruno-shi, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan